

22 kW mobile charging station **JUICE BOOSTER 2**



Just take your charging station with you. Wherever there's power, you can charge. No more concerns about distance.

With JUICE BOOSTER 2 you can always charge at maximum speed, in complete safety, irrespective of the power connection type – automatically adjusted to the right setting. Both at home and on the road.



juice
BOOSTER2

www.juice-asia.com

JUICE BOOSTER 2 - the mobile charging station for anywhere



The JUICE BOOSTER 2 can also be used as a wallbox by installing the specially designed bracket.

Wallbox



Perfect storage

Free small storage bag, strong durable, placed in the car trunk, saves space.



JUICE CONNECTOR

Automatic adapter recognition with fully automatic charging power adjustment.

Mobile charging station



+ 25 more

A wide range of adapter types for all household and industry sockets is able to ensure electric vehicle charging reliability.

i 2-in-1 solution:

The world's smallest and safest mobile 22 kW charging station is a complete solution.



1

Mobile charging station

Plug in, charge your vehicle whenever, wherever



2

Wallbox

thanks to the specially designed wall bracket

i Individual design

You can charge with single or three-phase power up to 32 amps – for 3,7, 7,4, 11 or 22 kW. Your battery will be fully charged in just 1 – 4 hours under ideal conditions.

In short, JUICE BOOSTER 2 is the perfect charging station for all-round use.



Waterproof

IP67 dustproof and waterproof, all-weather design.

The adapter lock

The password lock guarantees all the time anti-theft security.



National standard plug

Suitable for all electric vehicles with seven-hole new national standard interface on the market.



3 tonnes

Able to withstand a wheel load up to 3 tonnes when driving over it by mistake.



Rubber protective cover

Ensure the durability of the plug and the cleanliness of the plug contacts.

Ultra-light

weighing less than 1 kg.

Integral residual current detection

It detects DC and AC faults and stops charging at the specified value.

i Residual current circuit breaker


Integral protection from DC and AC faults means you don't have to install any earth leakage protection socket. This can save you additional costs and labour.

i Wall bracket

When going out, the JUICE BOOSTER 2 can be simply removed from the bracket.



JUICE BOOSTER 2 - Completely carefree travel

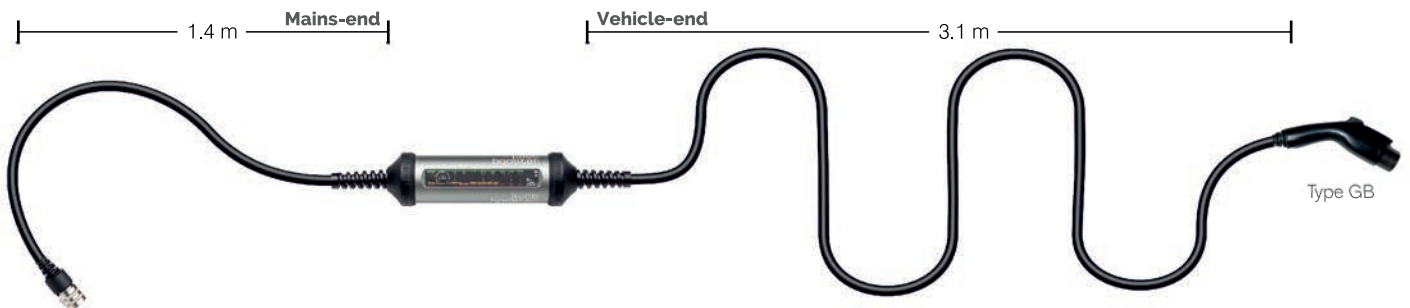

- Consistently successfully tested.**
Guaranteed compatibility: compatible with all existing and new electric vehicles on the market with a Type GB connector.
- Robust**
Extremely stable aluminium housing, weather-resistant (plug: splashproof and dustproof, housing: fully waterproof).
- Safe JUICE CONNECTOR**
The aluminium connector is designed using aerospace technology and can even withstand being run over, offering guaranteed safety and flexibility during each charging process.



For more information and accessories, please visit www.juice-asia.com/juice-booster

Technical specifications

Dimensions	Diameter: 70 mm Length: 225 mm
Weight	1.0 kg excluding cables 3.2 kg with cables and plugs
Input current	230 V 6–32 A (single phase) or 400 V 6–32 A (3-phase) AC
Power output	1.4 – 22.0 kW AC input current dependent
Colour	Metallic anthracite, black cable
Operating temperature	-30°C to +50°C

CE conformity	IEC 62752, 62196, 61851, Mode 2/3, EMV, RoHS
Protection level - RCD -protection	IP67 - RCD DC 6 mA, AC 30 mA - protective earth conductor monitoring, temperature monitoring
Mains-end Connector	Over 25 self-detecting adapters suitable for household, industrial and EV sockets, cable 1.4 m + adapter approx. 30 cm
Vehicle-end Connector	Seven-hole new national standard plug Cable length 3.1 m

Subject to change without notice.